


Non-Woven Quick-Strip Discs



Non-Woven Quick-Strip discs are used to clean, strip rust, paint or carbon from a wide range of surfaces.

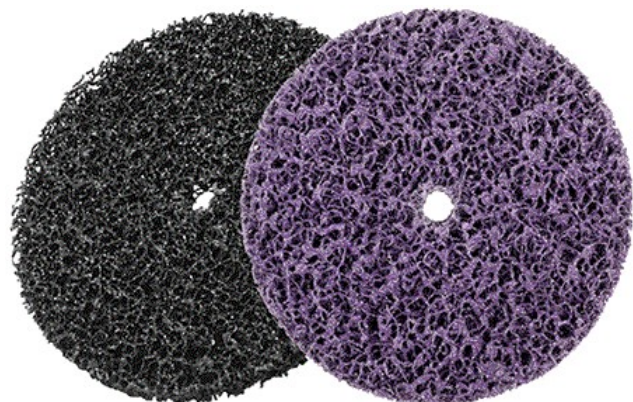

Safety



Flap Discs perform best between 50-80m/s, this giving the optimum balance between stock removal, surface finish, cutting temperature and life.

NB! Excess speed is dangerous and may result in the disc disintegration, grain shedding and overheating.

NEVER USE FLAP DISCS AT SPEEDS IN EXCESS OF 80m/s.

Do not use wet or in any coolant or oil.

Use in accordance to ANSI B7.1.

Diameter	Maximum Speed rpm	Maximum Speed m/s
50mm	7600	15000
75mm	5100	10000
100mm	3800	7500
150mm	2500	5100
180mm	5000	4800

Standard Sizes

Size	Hole	Velcro	Black	Purple
50mm	●		●	●
75mm	●		●	●
100mm	●		●	●
150mm	●		●	●
180mm		●	●	●



Velcro Loop Disc



Disc Mandrels

Mandrels are available to be used in a hand tool



Mini Spindle Wheel



For Quick-Strip Flap Disc and Quick-Loc disc please refer to Pg 32 and Pg 31 respectively